


Sägezahn-Rillenstutzen für Schellenmontage


X Edelstahl

Bestellnummer	Nennweite (DN)	Gewinde (in Zoll)	Gewindenorm	Betriebsdruck (in bar)
214500130100	13	R $\frac{1}{2}$ " AG	DIN 2999	PN10
214500190100	19	R $\frac{3}{4}$ " AG	DIN 2999	PN10
214500250100	25	G1" AG	ISO 228	PN10
214500320100	32	G1 $\frac{1}{4}$ " AG	ISO 228	PN10
214500380100	38	G1 $\frac{1}{2}$ " AG	ISO 228	PN10
214500500100	50	G2" AG	ISO 228	PN10
214500650100	65	G2 $\frac{1}{2}$ " AG	ISO 228	PN10
214500651100	65	G3" AG	ISO 228	PN10
214500750100	75	G3" AG	ISO 228	PN10
214500800100	80	G3" AG	ISO 228	PN10
214501000100	100	G4" AG	ISO 228	PN10

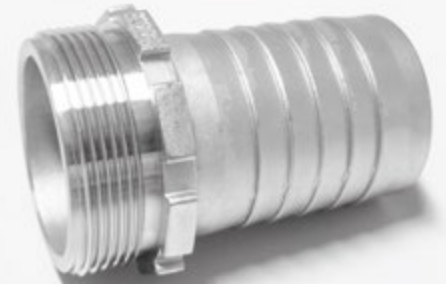

X Messing

Bestellnummer	Nennweite (DN)	Gewinde (in Zoll)	Gewindenorm	Betriebsdruck (in bar)
214500130400	13	R $\frac{1}{2}$ " AG	DIN 2999	PN10
214500131400	13	R $\frac{3}{4}$ " AG	DIN 2999	PN10
214500160400	16	R $\frac{1}{2}$ " AG	DIN 2999	PN10
214500190400	19	R $\frac{3}{4}$ " AG	DIN 2999	PN10
214500191400	19	G1" AG	ISO 228	PN10
214500250400	25	G1" AG	ISO 228	PN10
214500320400	32	G1 $\frac{1}{4}$ " AG	ISO 228	PN10
214500380400	38	G1 $\frac{1}{2}$ " AG	ISO 228	PN10
214500381400	38	G2" AG	ISO 228	PN10
214500500400	50	G2" AG	ISO 228	PN10
214500650400	65	G2 $\frac{1}{2}$ " AG	ISO 228	PN10
214500651400	65	G3" AG	ISO 228	PN10
214500750400	75	G3" AG	ISO 228	PN10
214500800400	80	G3" AG	ISO 228	PN10
214500900400	90	G3" AG	ISO 228	PN10
214501000400	100	G4" AG	ISO 228	PN10

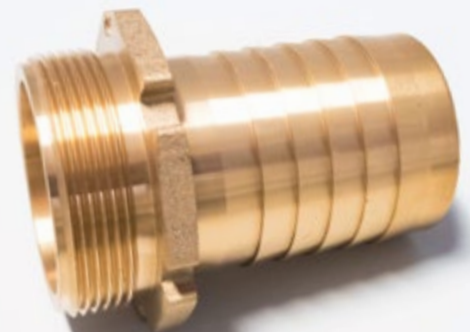

X Leichtmetall

Bestellnummer	Nennweite (DN)	Gewinde (in Zoll)	Gewindenorm	Betriebsdruck (in bar)
214500750200	75	G3" AG	ISO 228	PN10

